


WC

PRODUCT NOMENCLATURE

100	WC	45	22	7.5
Outlet Size (mm)	Pump Type	Rated Flow (m³/h)	Rated head (m)	Power (kW)

RANGE CHARACTERISTICS


Power	0.75-7.5 kW
Poles	2
Discharge	DN50 - 150
Max flow rate	170 m³/h
Max head	32 m

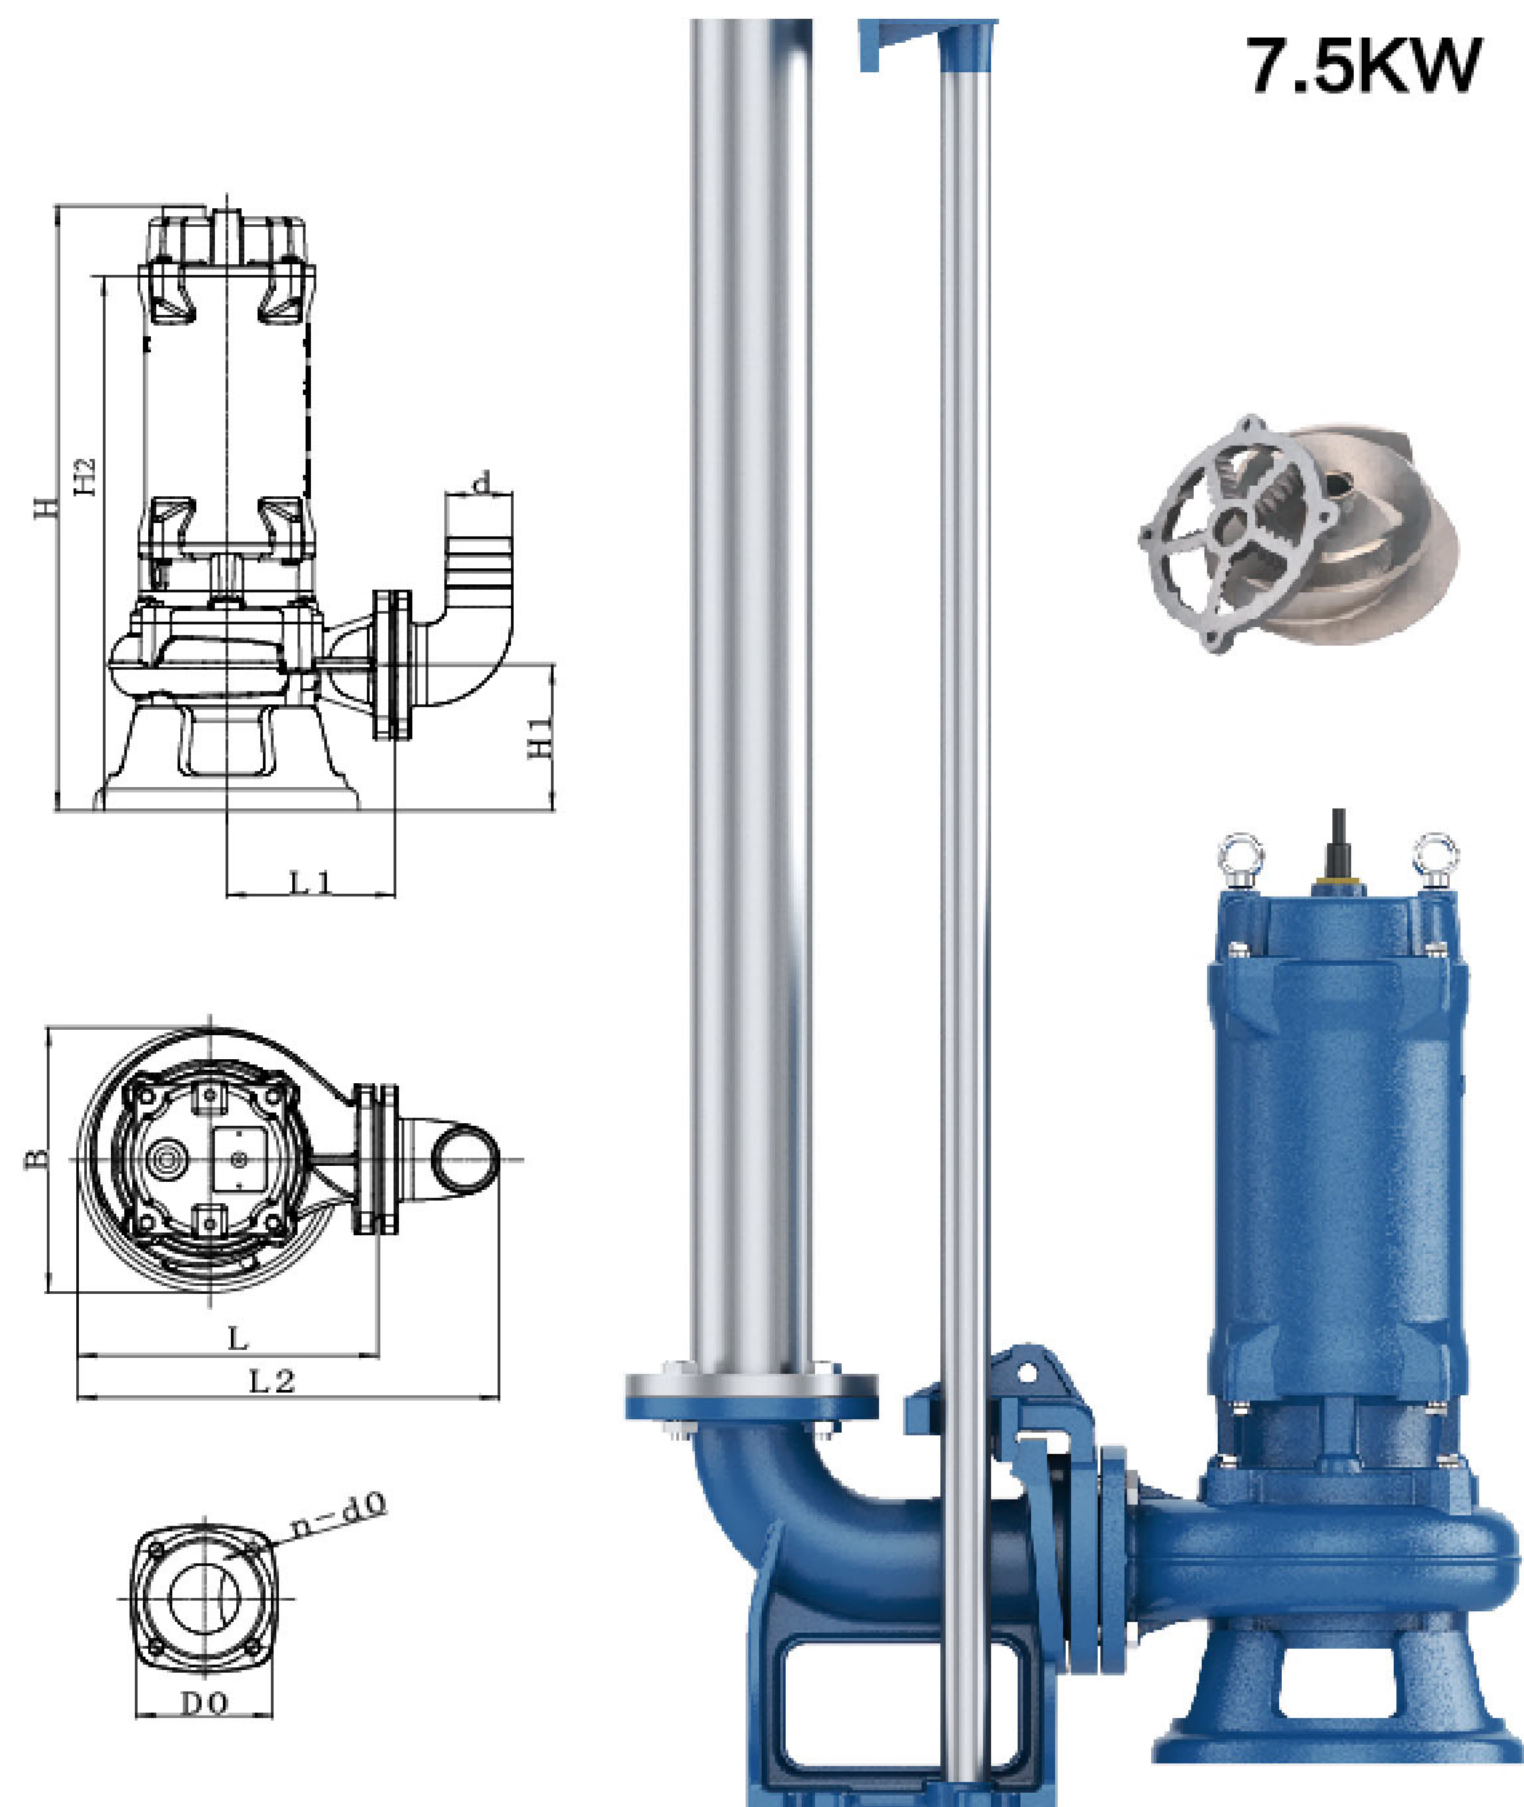

DIMENSION

Type	A (mm)	L (mm)	L2 (mm)	L1 (mm)	B (mm)	H (mm)	H1 (mm)	H2 (mm)	d (mm)	D0 (mm)	n-d0 (mm)
50WC10-10-0.75	40	215	309	122	186	453	94	378	48	110	13
50WC10-12-1.1	40	215	309	122	186	453	94	378	48	110	13
50WCm12-15-1.5	50	237	334	131	212	473	111	399	48	110	13
50WC12-15-1.5	50	237	334	131	212	485	111	409	48	110	13
65WC25-10-1.5	65	237	352	131	212	485	111	409	62	130	13
50WCm12-23-2.2H	50	257	354	151	212	485	111	409	48	110	13
65WC25-15-2.2	65	286	400	160	252	503	128	426	62	130	13
80WC35-10-2.2	80	286	405	160	252	503	128	426	74	150	18
50WC20-22-3H	50	258	354	150	219	542	115	475	48	110	13
65WC35-15-3	65	266	382	160	219	555	120	487	62	130	13
80WC45-12-3	80	270	390	165	219	555	120	487	74	150	18
50WC20-26-4H	50	281	377	155	253	568	131	501	48	110	13
65WC25-22-4	65	287	402	160	253	576	139	509	62	130	13
80WC50-17-4	80	290	410	164	253	576	139	509	74	150	18
100WC65-12-4	100									170	18
65WC30-25-5.5	65	326	440	186	280	620	134	550	62	130	13
80WC45-20-5.5	80	310	429	170	280	645	146	575	74	150	18
100WC65-15-5.5	100	310	470	170	280	645	146	575	100	170	18
65WC20-36-7.5H	65	326	440	186	280	620	134	550	62	130	13
80WC45-22-7.5	80	320	439	180	293	655	152	585	74	150	18
100WC100-12-7.5	100	320	480	180	293	655	152	585	100	170	18

WC

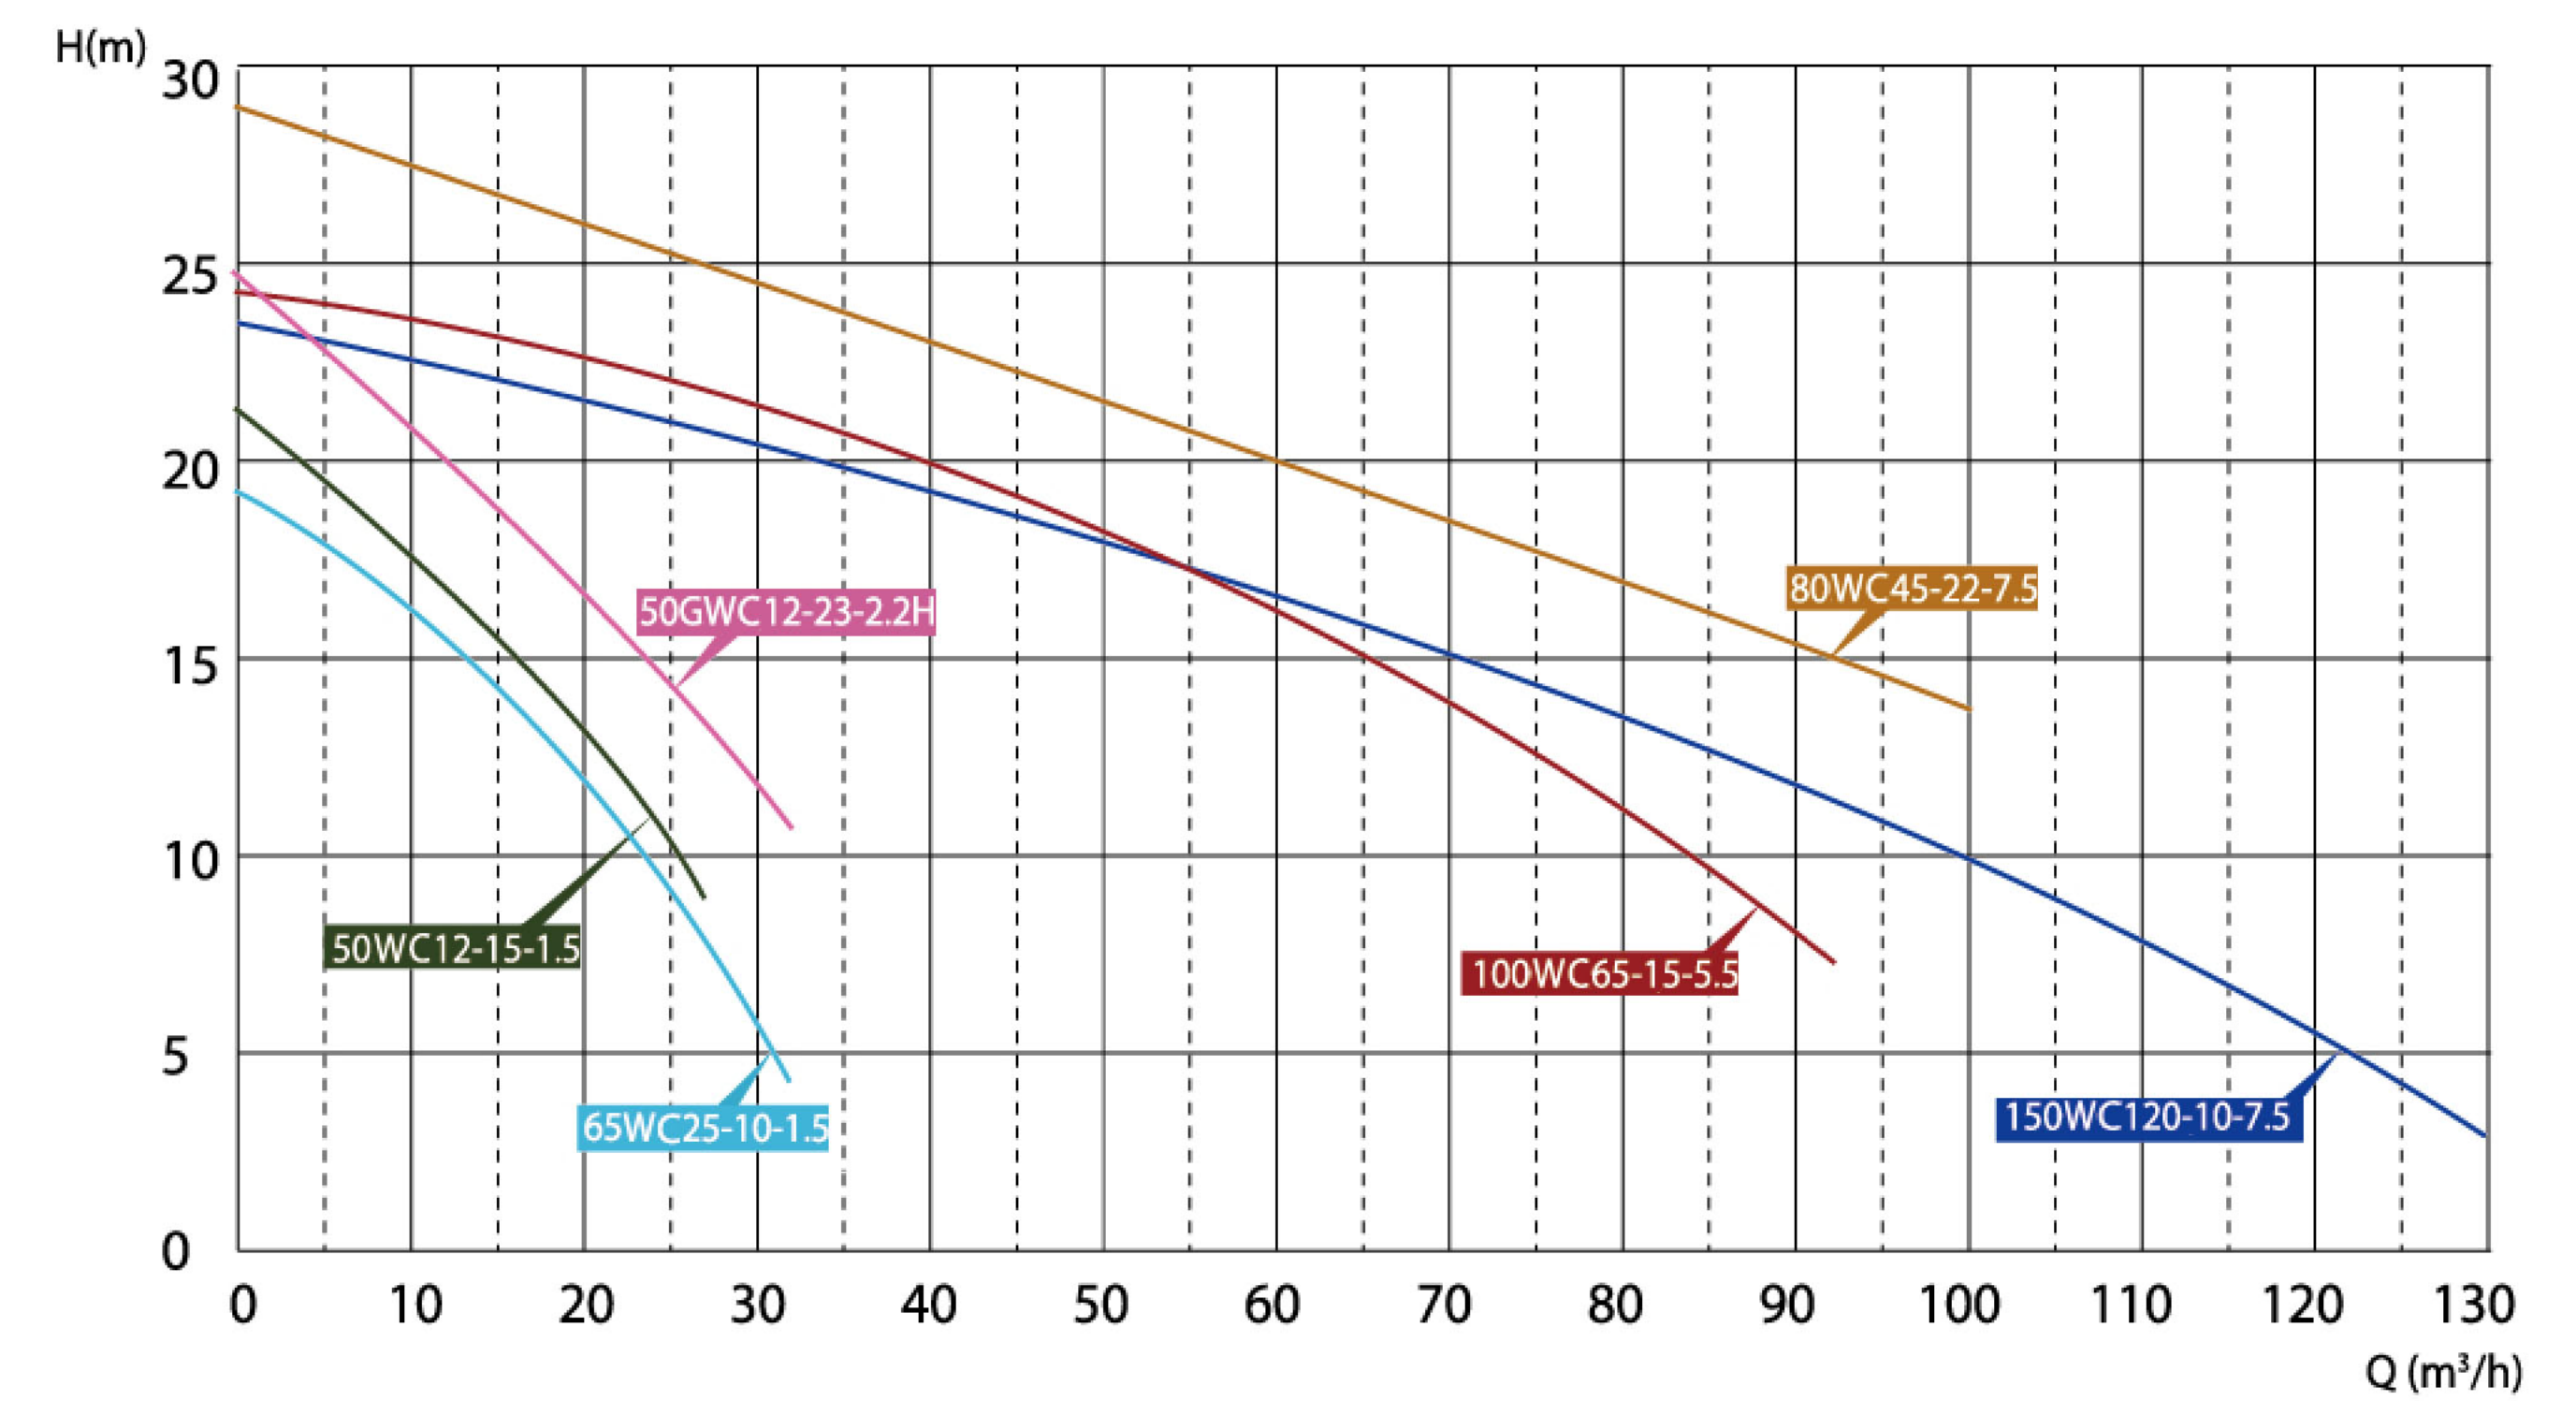

WC

TYPE	Voltage (V)	Power		Outlet		Particle Size (mm)	Q.rated (m³/h)	H.rated (m)	Q. max (m³/h)	H.max (m)	Speed (r/min)	G.W. (kg)	Dimensions (cm)
		(KW)	(HP)	(inch)	(mm)								
50WCm10-10-0.75	1Ph/220V	0.75	1	2"	50	20	10	10	20	14.3	2860	27.6	55*22*.24
50WC10-10-0.75	3Ph/380V	0.75	1	2"	50	20	10	10	20	14.3	2860	26.6	55*22*24
50WCm10-12-1.1	1Ph/220V	1.1	1.5	2"	50	20	12	10	18	15.1	2860	27.6	56*23*25
50WC10-12-1.1	3Ph/380V	1.1	1.5	2"	50	20	12	10	18	15.1	2860	27.5	56*23*25
50WCm12-15-1.5	1Ph/220V	1.5	2	2"	50	20	12	15	29	19.6	2860	37	59*26*27
50WC12-15-1.5	3Ph/380V	1.5	2	2"	50	20	12	15	29	19.6	2860	36	59*26*27
65WC25-10-1.5	3Ph/380V	1.5	2	2.5"	65	26	25	10	33	19	2860	37	59*26*27
50WCD12-22-2.2H	1Ph/220V	2.2	3	2"	50	20	12	22	32	31	2860	42	61*29*29
50WC12-22-2.2H	3Ph/380V	2.2	3	2"	50	20	12	22	32	31	2860	40	61*29*29
65WC25-15-2.2	3Ph/380V	2.2	3	2.5"	65	26	25	15	34	23	2860	41	61*29*29
80WC35-10-2.2	3Ph/380V	2.2	3	3"	80	32	35	10	49	21	2860	43	61*29*29
50WC20-22-3H	3Ph/380V	3	4	2"	50	20	20	22	37	31	2860	46	63*26*30
65WC35-14-3	3Ph/380V	3	4	2.5"	65	26	35	145	51	23.3	2860	47	62*26*30
80WC45-12-3	3Ph/380V	3	4	3"	80	32	40	12	55	21	2860	47	63*26*30
50WC20-26-4H	3Ph/380V	4	5.5	2"	50	20	20	26	45	33	2860	52	64*29*32
65WC25-22-4	3Ph/380V	4	5.5	2.5"	65	26	25	22	60.1	27.7	2860	52	64*29*32
80WC50-17-4	3Ph/380V	4	5.5	3"	80	32	45	17	72.2	26.7	2860	54	64*29*32
100WC65-12-4	3Ph/380V	4	5.5	4"	100	32	65	12	90	24	2860	55	64*29*32
65WC30-25-5.5	3Ph/380V	5.5	7.5	2.5"	65	26	30	25	95	31	2860	65	73*29*35
80WC45-20-5.5	3Ph/380V	5.5	7.5	3"	80	32	45	20	100	30	2860	66	73*29*35
100WC65-15-5.5	3Ph/380V	5.5	7.5	4"	100	40	65	15	111	24	2860	69	73*29*35
65WC20-36-7.5H	3Ph/380V	7.5	10	2.5"	65	26	20	36	39	46	2860	77	73*29*35
80WC45-22-7.5	3Ph/380V	7.5	10	3"	80	32	45	22	96	31	2860	78	73*29*35
100WC100-12-7.5	3Ph/380V	7.5	10	4"	100	40	100	12	142	27	2860	78	73*29*35


WC

PRODUCT NOMENCLATURE

100	WC	45	22	7.5
Outlet Size (mm)	Pump Type	Rated Flow (m³/h)	Rated head (m)	Power (kW)

RANGE CHARACTERISTICS

Power	11-22 kW
Poles	2
Discharge	DN50 - 150
Max flow rate	300 m³/h
Max head	50 m

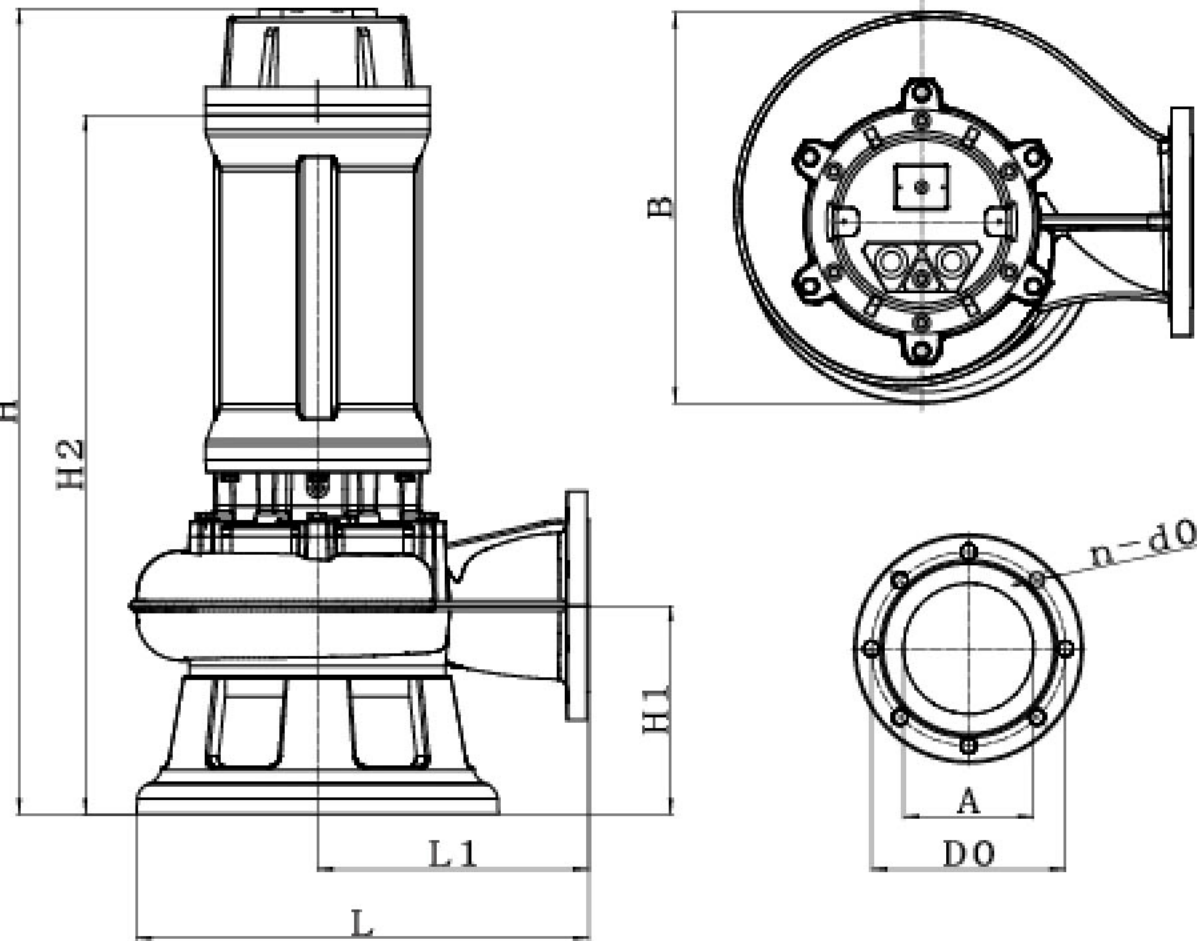


DIMENSION

Type	A (mm)	L (mm)	L1 (mm)	B (mm)	H (mm)	H1 (mm)	H2 (mm)	D0 (mm)	n-d0 (mm)
50WC15-55-11	50	365	210	333	773	113	650	110	4-13
80WC60-30-11	80	478	268	420	910	228	786	150	4-18
100WC80-25-11	100	490	280	420	910	228	786	170	4-18
150WC130-15-11	150	525	315	455	930	242	790	225	8-18
50WC30-60-15	50	365	210	333	773	113	650	110	4-13
80WC60-35-15	80	478	268	420	910	228	786	150	4-18
100WC80-30-15	100	490	280	420	910	228	786	170	4-18
150WC130-25-15	150	525	315	455	930	242	790	225	8-18
100WC80-35-18.5	100	490	280	420	1010	228	886	170	4-18
150WC180-20-18.5	150	525	315	455	1030	242	890	225	8-18
100WC80-40-22	100	490	280	420	1010	228	886	170	4-18
150WC180-25-22	150	525	315	455	1030	242	890	225	8-18



WC

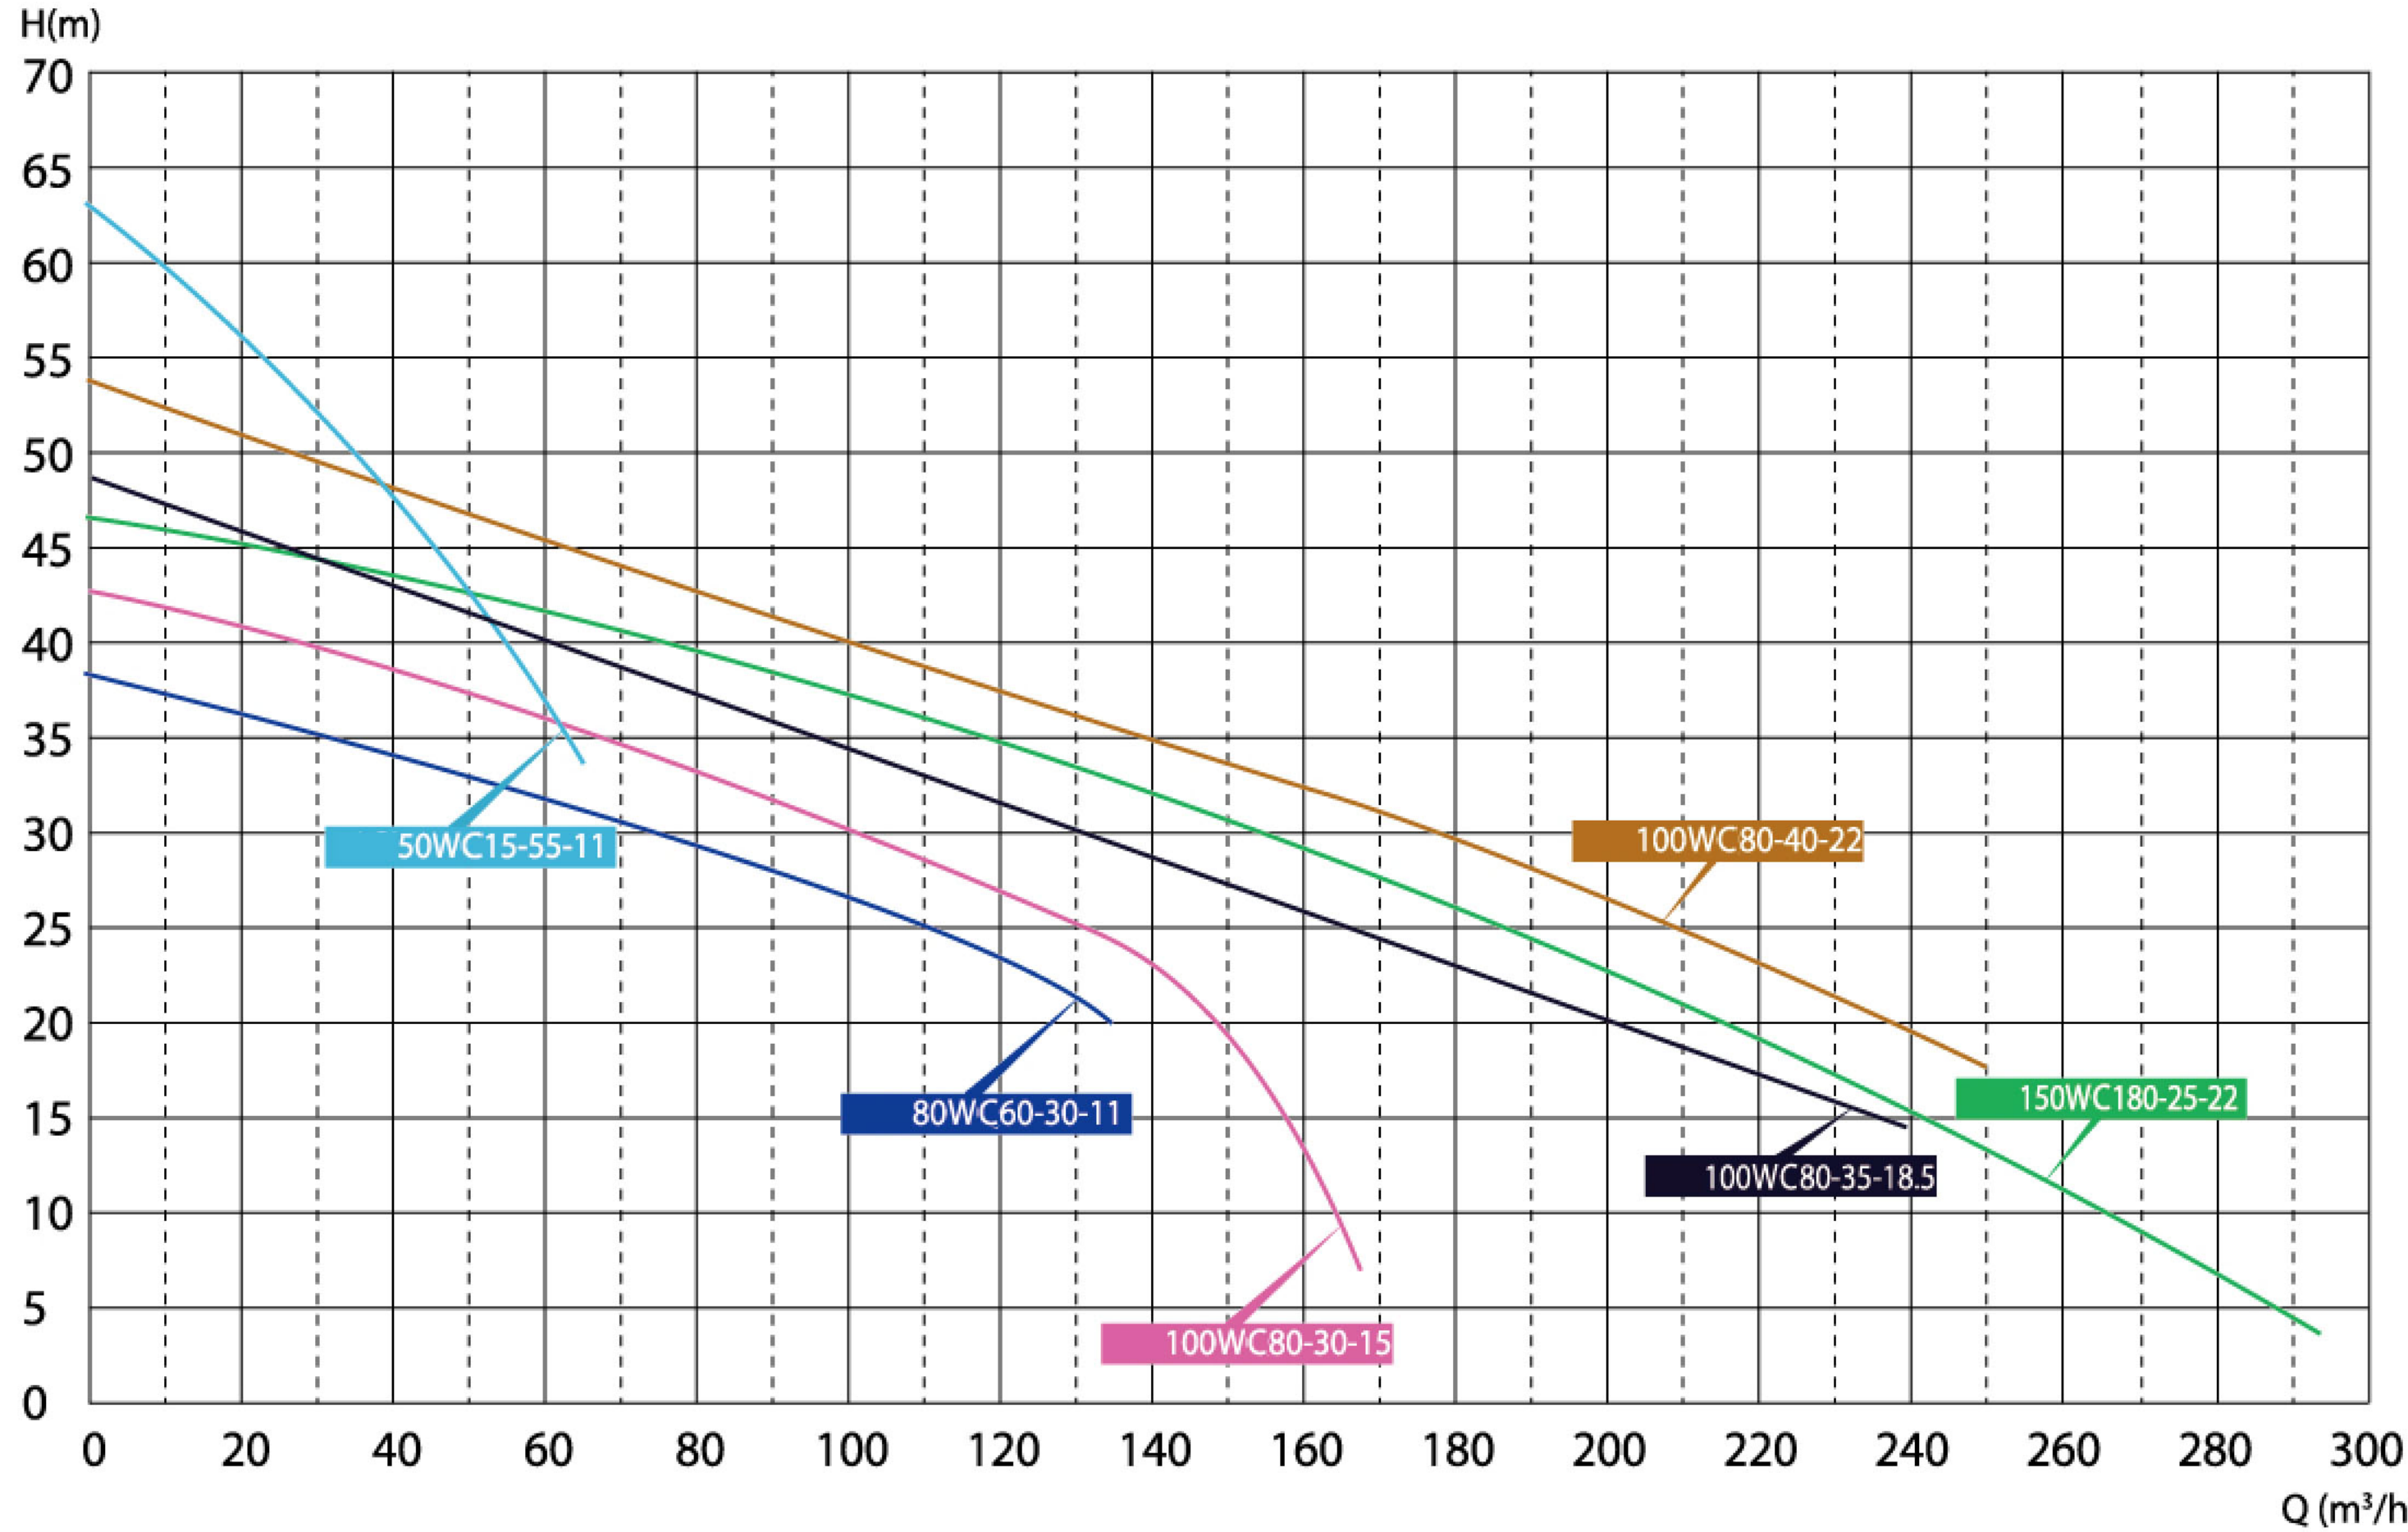

WC

TYPE	Voltage (V)	Power		Outlet		Particle Size (mm)	Q.rated (m³/h)	H.rated (m)	Q. max (m³/h)	H.max (m)	Speed (r/min)	G.W. (kg)	Dimensions (cm)
		(KW)	(HP)	(inch)	(mm)								
50WC15-55-11	3Ph/380V	11	15	2"	50		15	55	62	62	2860	148	51*44*107
80WC60-30-11	3Ph/380V	11	15	3"	80		60	30	133	38	2860	173	
100WC80-25-11	3Ph/380V	11	15	4"	100		80	25	167	40	2860	177	
150WC130-15-11	3Ph/380V	11	15	6"	150		130	15	172	42	2860	190	
50WC30-60-15	3Ph/380V	15	20	2"	50		30	60	65	68	2860	162	
80WC60-35-15	3Ph/380V	15	20	3"	80		60	35	152	49	2860	189	
100WC80-30-15	3Ph/380V	15	20	4"	100		80	30	167	42	2860	192	
150WC130-25-15	3Ph/380V	15	20	6"	150		130	25	180	46	2860	205	
100WC80-35-18.5	3Ph/380V	18.5	25	4"	100		80	35	234	48	2860	224	58*47*115
150WC180-20-18.5	3Ph/380V	18.5	25	6"	150		180	20	280	46	2860	239	
100WC80-40-22	3Ph/380V	22	30	4"	100		80	40	253	53	2860	228	
150WC180-25-22	3Ph/380V	22	30	6"	150		180	25	294	46	2860	243	